
Intercom System

WIS

Instruction Manual


I. Introduction

Thank you for choosing WIS intercom products. WIS is a water proof wireless belt pack which is running on UHF frequency. The available frequency is from 860-870 MHz. System supports max eight users talking together and unlimited listener.

The belt pack uses 3.7v 14500 Li-on battery and can be charged through Type-C connector.

II. Features

1. Frequency: 860~870 MHz,
2. Transmit distance: 0.5 KM in open area
3. Supports the relay mode
4. Max six full-duplex speakers
5. Unlimited listener
6. 16 Preset frequency channels
7. 1-3 14500 Li-on battery supports long standby and working time
8. Type-C for charging and setting

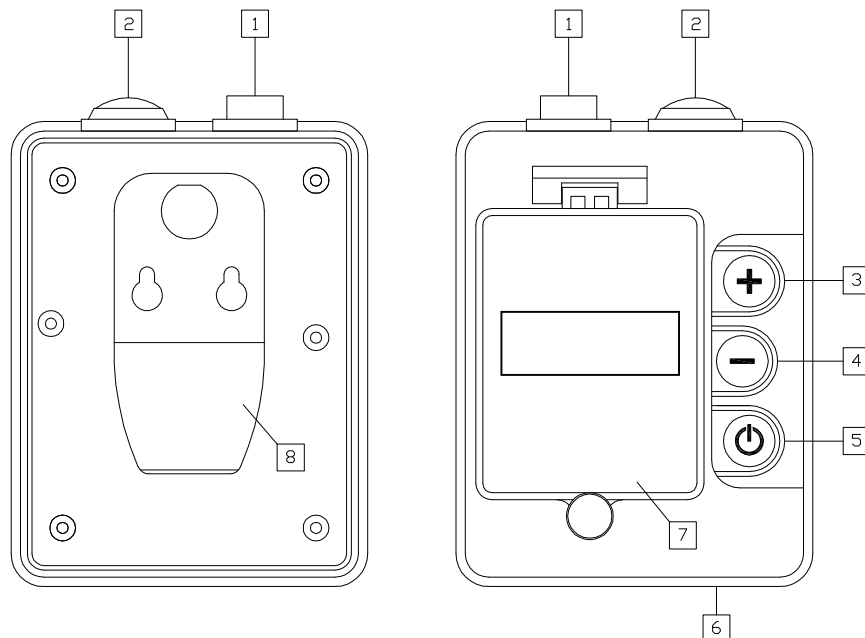

III. Functions

1. Aviation Headset Connector

Headset connector

2. Microphone Button

Microphone control button with 2 working function.

1. PTT: Press to talk.

2. Latch: Single click to lock the microphone button. Click again to release the button.
When microphone is turn on, the volume + button lights red.

3. Volume +

To increase the volume.
Adjustment button with Power button work together.
When microphone is turn on, this button lights red.

4. Volume -

To decrease the volume.
Adjustment button with Power button work together.

5. Power Button

Hold the button more than 3s will turn on or turn off the belt pack.
Clicking the button will announce the current channel number.
Holding the button and press Volume + or Volume - button to **change the channel.**

6. Type-C Connector

Charge the battery .

7. Battery Compartment

Fit 1~3 14500 Lion battery

8. Belt Clip

Supports to hang the belt pack on belt or wall or tripod.